

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Job Location \_\_\_\_\_

Approval \_\_\_\_\_

Engineer \_\_\_\_\_

Contractor's P.O. No. \_\_\_\_\_

Approval \_\_\_\_\_

Representative \_\_\_\_\_

# Slab Sensor 072

Dimensions: 3/8" OD x 1-1/2"  
(10mm OD x 38mm)

The Slab Sensor 072 is designed to measure temperature in outside snow melting slabs. It has a high density polyethylene (HDPE) sleeve which is designed for use in conduits, soils, or concrete, as it is suitable for direct burial. This product is supplied with 20 ft (6 m) of 2 conductor cable.



Slab Sensor 072


## Slab Sensor 072

DESCRIPTION	PROPERTY
Literature	ES-WR-Slab_Sensor-072, IOM-WR-Slab_Sensor-072
Packaged weight	0.4 lbs (180 g)
Dimensions	3/8" OD x 1-1/2" (10 mm OD x 38 mm)
Sensor material	HDPE sleeve, 20' (6 m) HDPE jacketed wire
Approvals	CSA C US
Operating range	-58 to 140°F (-50 to 60°C)
Sensor	NTC thermistor, 10 kΩ @ 77°F (25°C ±0.2°C) β=3892

## Features

- 10K thermistor
- Water resistant
- 20 ft (6 m) cable

## Side View

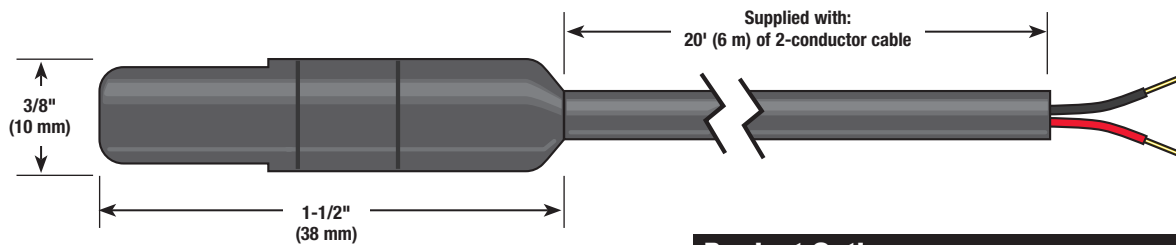

## Product Options

Qty	Description	Model#	Order#
	Slab Sensor 072	300141	81007203

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: T: (800) 276-2419 • F: (417) 864-8161 • Watts.com  
Canada: T: (905) 332-4090 • F: (905) 332-7068 • Watts.ca  
Latin America: T: (52) 81-1001-8600 • Watts.com

ES-WR-Slab\_Sensor-072 1324

© 2019 Watts